











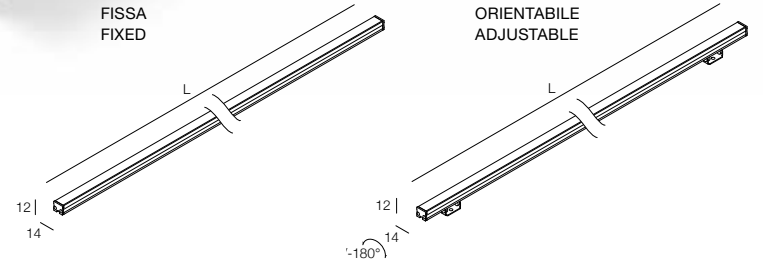


-  IP40
-  Class III
-  Montaggio a parete, soffitto, pavimento  
Wall, ceiling, floor mounting
-  Cavo 60 cm con connettore rapido  
60 cm cable with quick connector
-  Collegare in parallelo 24Vdc  
Connect in parallel at 24Vdc
-  100 gr (L=50 cm)




### COMETA LC IP40

IP40	12W/m 24 Vdc	25W/m 24 Vdc	Finiture Finish	Colore LED LED Colour
Lumen 3000K	1000lm/m	2000lm/m		
<b>Fissa Fixed</b>	 Copertura opalina Opal cover	TFP1-_____ SFP1-_____	 3 Grigio - Gray  4 Nero - Black	 Y 2700K  6 3000K  W 3000K CRI > 90  9 4000K  1 5000K
<b>Orientabile Adjustable</b>	 Copertura opalina Opal cover	TOP1-_____ SOP1-_____		



#### COMETA LC Opal cover - 25W/m - 3000K

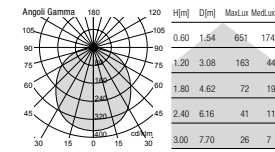

**50** cm Lunghezze modulo minimo 50 cm  
 massimo 200 cm, con multipli di 10 cm.  
**200** cm

Module lengths are available from 50 cm up to 200 cm by multiple of 10 cm.

ALIMENTATORI CONSIGLIATI (non inclusi)  
 SUGGESTED DRIVERS (not included)

24Vdc CV70-F-24-N  
 page 175